

**MODULAR DRY BATCH READY MIX PLANT (60M<sup>2</sup>/H)**

1. CONTROL CABIN (6m CONTAINER)
2. WATER, ADDMIX WEIGHBIN'S AND PUMPS (MOUNTED IN 12m CONTAINER)
3. LABORATORY / WORKSHOP
4. 36 000 LITRE WATER TANK (6m CONTAINER)
5. 80TON SILO (12m HIGH CUBE CONTAINER)
6. BATCH PLANT (12m CONTAINER STRUCTURE)

**STANDARD FEATURES :**

- COMPLETE PLUG AND PLAY ELECTRICAL SYSTEM
- FULLY AUTOMATED BATCHING SYSTEM







**OPTIONAL:**

7. CONTAINERISED BULK BAG GANTRY
8. 2ND 80TON SILO (12m HIGH CUBE CONTAINER)
9. 2ND CONTAINERISED BULK BAG GANTRY
10. 50KG OR 2TON DEBAGGING STATIONS

**NOTE: 100 K.V.A GENSET CAN BE SUPPLIED**

**BENEFITS OF A METATE MODULAR PLANT**

- NO CONCRETE FOUNDATION REQUIRED
- NO ELECTRICIAN REQUIRED
- EASY TO TRANSPORT, 5x NORMAL TRUCKS
- EASY TO SET UP. CAN BE DONE IN 2 DAYS
- ALL YOU NEED IS A WATER SUPPLY AND A LEVELED AND COMPACTED BASE FOR PLANT FOOTPRINT

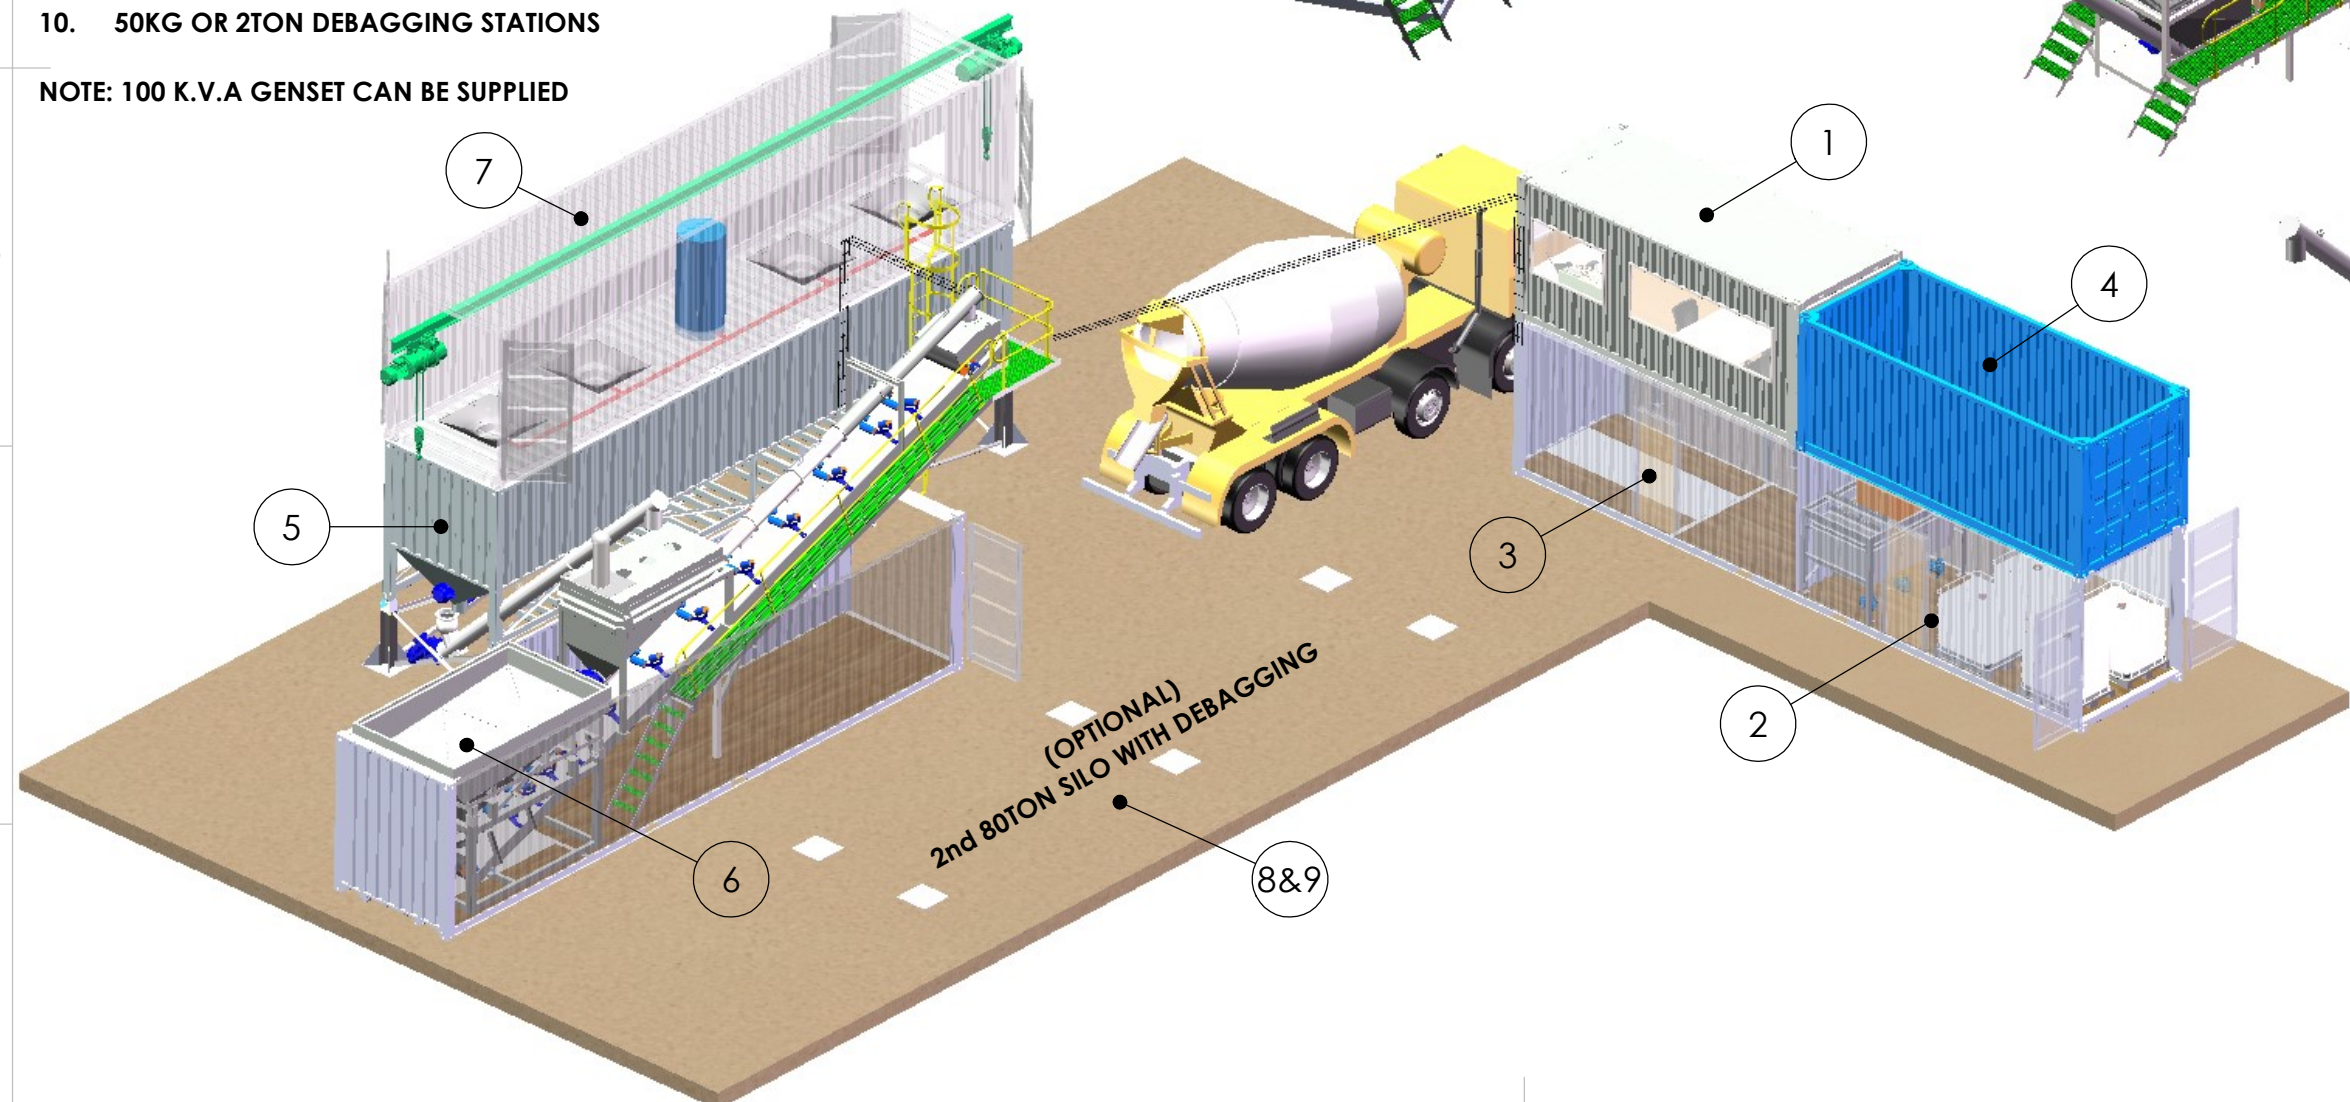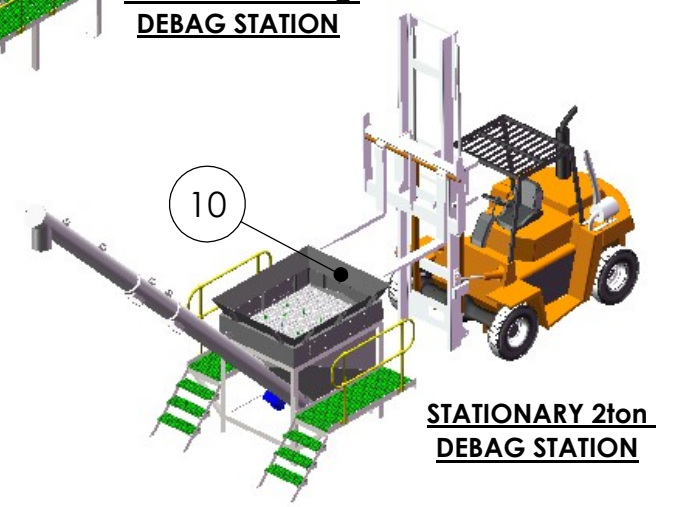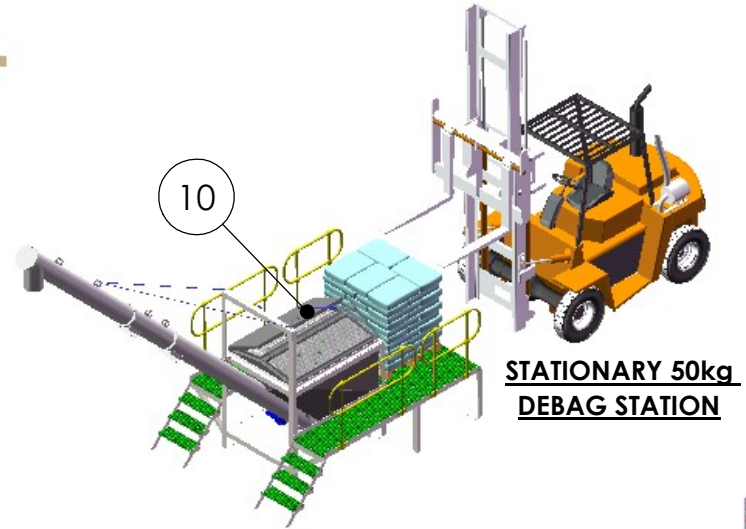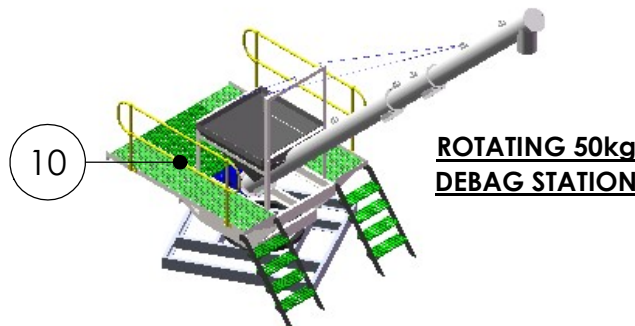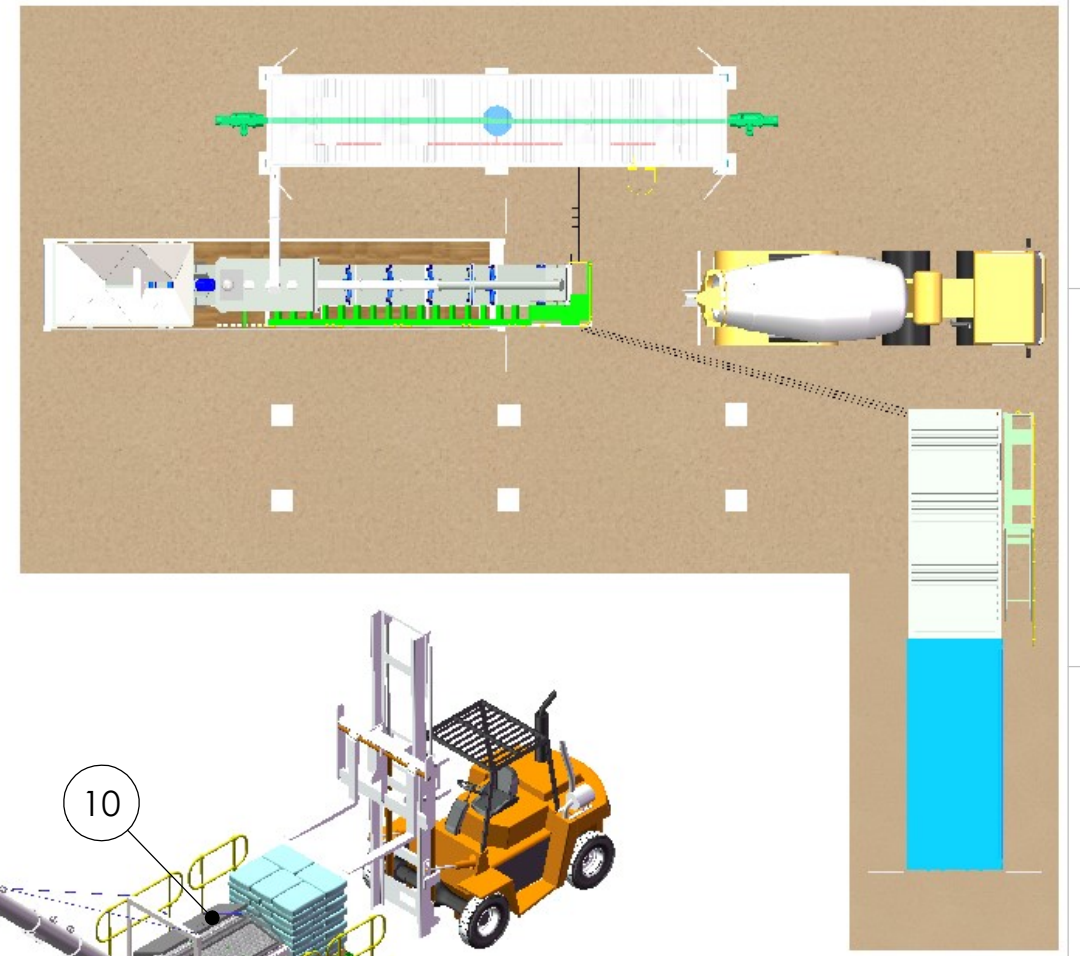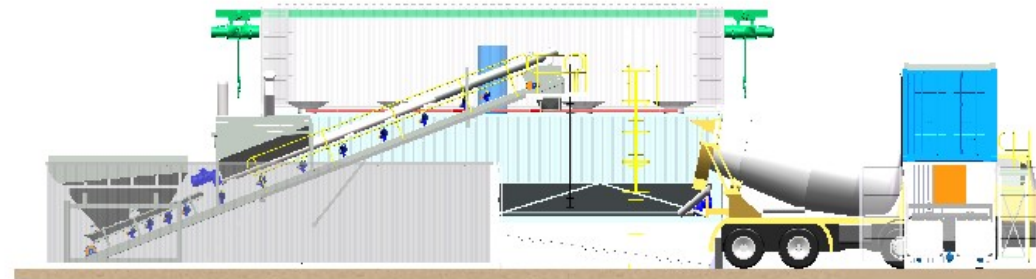

(OPTIONAL)  
2nd 80TON SILO WITH DEBAGGING  
8&9

REV	DESCRIPTION	DATE	INITIAL
<b>METATE</b>			
TITLE <b>MODULAR DRY BATCH READY MIX PLANT</b>			
DRAWING NO.			
CAD FILE	SCALE	SHEET 1 of 1	SIZE A3
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <b>METATE CONSTRUCTION EQUIPMENT</b> ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF <b>METATE CONSTRUCTION EQUIPMENT</b> IS PROHIBITED.			